
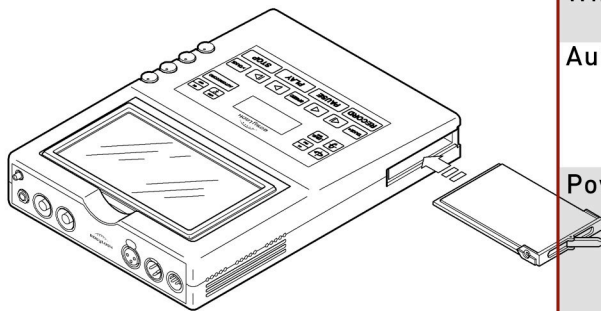


VIDEO ASSIST HARDDISK RECORDER

- Variable simulated frame rate
- Camera-triggered recording
- Integrated wireless video
- Automatic frame rate detection
- Intuitive operation, hassle-free handling
- Large range of accessories
- Perfectly integrates into any film set
- Professional industry standard connectors

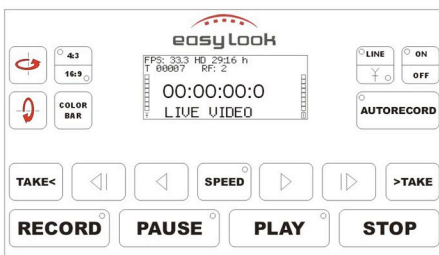

Playback functions	simulated frame rates 1-360 fps forwards and backwards, one-button playback
Storage capacity	exchangeable 80 GB harddisk 5,5 - 10,5 hours recording time per harddisk
Recording Resolution	Full PAL or NTSC
Aspect Ratio	4:3 or 16:9
Display	7" TFT color display, 350 nits max, left-right visible angle 90°
Wireless transmitter	1,4 GHz, 8 channels, 80mW or 2,4 GHz, 5 channels, 80mW
Automatic recording	camera-triggered recording and automatic camera speed read-out with all common film and video cameras possible (ARRI, Panavision, etc.)
Power supply	internal high performance Lithium-Ion battery alternatively: camera battery packs (12-32 Volts) connect via ARRI standard 2-pin Fischer camera cable
Built-in speakers	10 mW, 8 Ohm
Size	210 mm * 300 mm * 50 mm 8,27" * 11,81" * 1,97"

All specifications subject to change without prior notice.




Built on experience of industry professionals.


VIDEO ASSIST HARDDISK RECORDER




Accessories to your assistance.

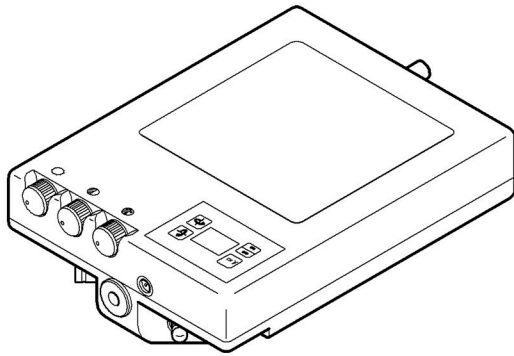


on-board monitor with video transmitter

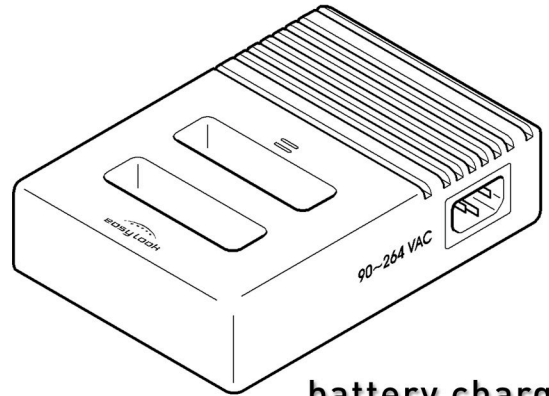


battery charger

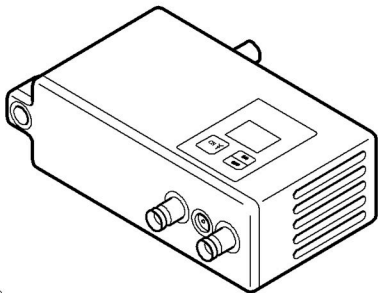

video transmitter

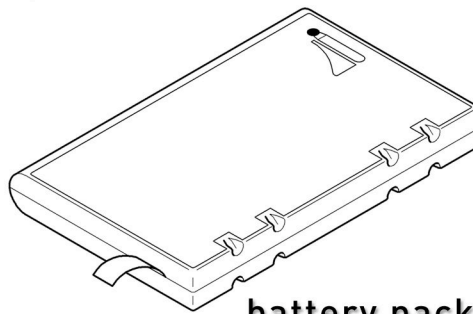


battery pack

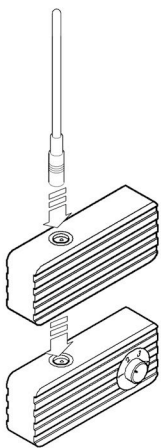


transmission booster

micro-video transmitter

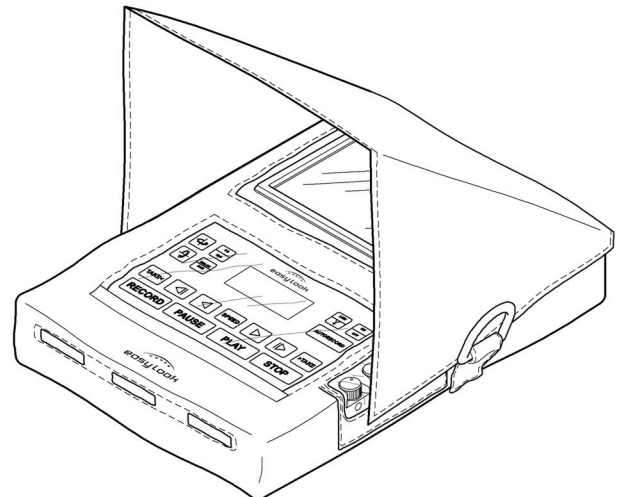

protective bag

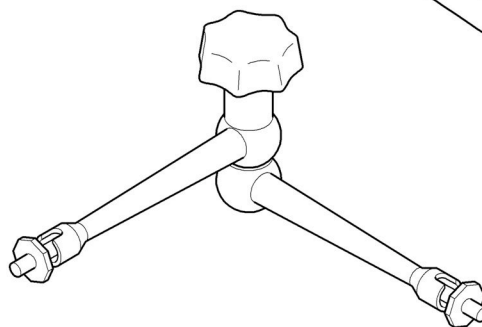

bracket accessory arm